




# PRODUCT LINE-UP



# OKADA Introduction



# OKADA

1

0

OKADA AIYON CORPORATION supplies a variety of attachments mounted on excavators and has been an innovator in the field for many years all over the world, providing a broad range of sophisticated demolition equipment, including hydraulic breakers, crushers, pulverizers, grapples and other attachments. OKADA is continually looking for ways to expand the capabilities and versatility of demolition attachments and as a result of that effort has become a world leader in the hydraulic attachment industry.



OKADA has been found to conform to the Quality Management System standard :  
ISO9001: 2008 / JIS Q 9001: 2008  
Certificate Number/ FM 621659  
Organization/ Head Office Osaka Japan



Company Name	OKADA AIYON CORPORATION
Head Office	4-1-18, Kaigan-dori, Minato-ku, Osaka 552-0022, Japan TEL: 81-6-6576-1268 FAX: 81-6-6576-1516 Web site: <a href="http://www.okada-aiyon.com">www.okada-aiyon.com</a>
Established	July, 1938
Employees	219
Stock's Listing	Listed on the First Section of the Tokyo Stock Exchange. (March, 2016)
Branch	11 domestic branches & approximately 40 sales channel all over the world.




---

# OKADA HYDRAULIC BREAKER



# okada series

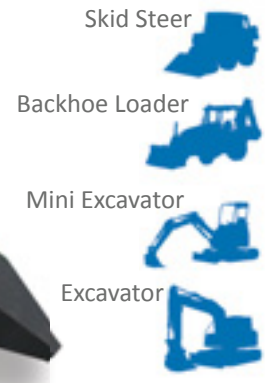

Higher quality equals longer life.  
Performance testing for all units.  
Excavator-friendly.



okada150 okada200 okada250 okada400 okada650 okada800 okada1000 okada1300 okada1500 okada2600 okada3600 okada6000 TOP800

## ◆ Specifications

	Unit	okada 150	okada 200	okada 250	okada 400	okada 650	okada 800	okada 1000	okada 1300	okada 1500	okada 2600	okada 3600	okada 6000	TOP800
Working Pressure	MPa	6~13	9~12	9~12	9~12	11~16	12~17	14~17	14~19	14~19	14~19	14~19	15~19	15~18
Required Oil flow for Breaker	L/min	12~25	12~25	15~30	23~70	30~65	35~75	50~110	75~120	65~100	120~175	180~250	230~310	260~380
Frequency	bpm	930~1300	800~1400	550~1000	600~1500	600~1100	400~920	350~1000	350-900	400~900	350~800	300~650	230~500	260~340
Operating Weight	kg	76	94	138	187	328	393	577	830	1043	1650	2610	3950	5600
Overall Length	mm	970	1070	1135	1450	1513	1609	2062	2125	2338	2679	3016	3627	4424
Working Steel Dia.	mm	40	40	45	57	70	75	90	95	105	135	150	169	189
Suitable Carrier Machine	ton	0.7~1.5	1.0~2.0	1.2~2.5	1.5~4	3~6.5	4.5~8	6~10	8~13	9~15	18~26	25~36	37~60	60~
Carrier Output Flow Range	lpm	12~30	13~40	15~42	30~70	35~70	40~110	70~135	70~140	80~140	140~210	208~290	280~350	280~382

Note) The above specifications are subject to change without notice.  
The above specifications assume the use of an OKADA Universal pin mount.

# Intelligent technology



Distributed by:

**OKADA AIYON CORPORATION**

[www.okada-aiyon.com](http://www.okada-aiyon.com)

4-1-18, Kaigan-dori, Minato-ku, Osaka 552-0022, Japan

Tel +81-(0)6-6576-1268 Fax +81-(0)6-6576-1516

Email [sales@aiyon.co.jp](mailto:sales@aiyon.co.jp)

[facebook.com/okadaaiyon](https://facebook.com/okadaaiyon)

[youtube.com/OkadaAiyonCorp](https://youtube.com/OkadaAiyonCorp)

